


LABELLER DYNAMIC 120

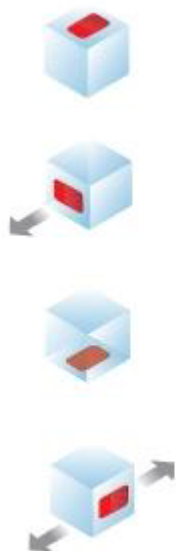

INDUSTRIAL STRENGTH

- ❖ Stainless steel fasteners and aluminium structure
- ❖ Operating 24/7

DESIGN AND STATE-OF-THE-ART TECHNOLOGY

- ❖ Label reel housing fitted with a special inflexible fibreglass polymer disk
- ❖ Metallic black colour epoxy powder coating, scratch and corrosion proof
- ❖ Drive unit easy to open and totally accessible to guarantee quick interventions

VERSATILITY & MODULARITY

- ❖ DYNAMIC L120 can apply labels on top, bottom, in front, on the side and around the corner of the product, and are available in right or left hand versions
- ❖ Labels reel housing available up to Ø 280 mm
- ❖ Limited space required & limited weight
- ❖ Independent Control Unit
- ❖ Remote Reel Housing available

SAFETY

- ❖ Limited Sharp edges; encased or button head screws reel housing and liner rewinder disks designed without holes for maximum safety.

CE marking (in conformity with 98/37/CE standard)



Rev. 03-2011

MAIN CHARACTERISTICS :

- ❖ Label reel housing diameter : External reel max. 280mm, core 45 or 75mm
- ❖ Usable liner width: Max 120 mm, Min 14 mm
- ❖ Dispensable label width: Max. 116 mm Min 8 mm
- ❖ Minimum gap between labels: 2 mm
- ❖ Max dispensing speed : 40 meters / min
- ❖ Accuracy : +/- 1 mm
- ❖ Power Supply : 230V - 50 Hz or 110V and 60 Hz

The machine frame includes:

- ❖ an integrated control unit; operator interface with membrane keyboards and graphic display back lighted by a 2,7" led. Multilanguage menu (Italian, English, French, German, Spanish, Portuguese and Russian) and different authorization levels "Operator", "Supervisor" and "Maintenance Servicer" (Supervisor and Maintenance Servicer menus are password protected). The firmware allows for the memorization of 100 "label programs" recalling many different settings : pre-dispensing, labelling speed, labelling point (application delay), encoder management, acceleration ramp, etc.

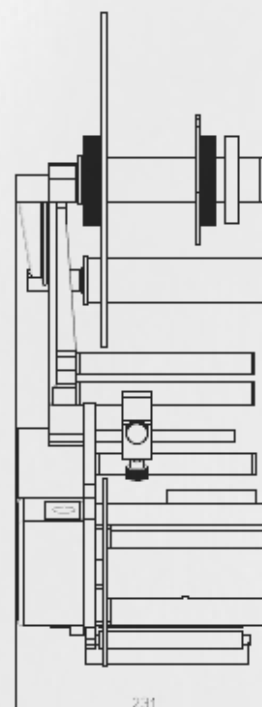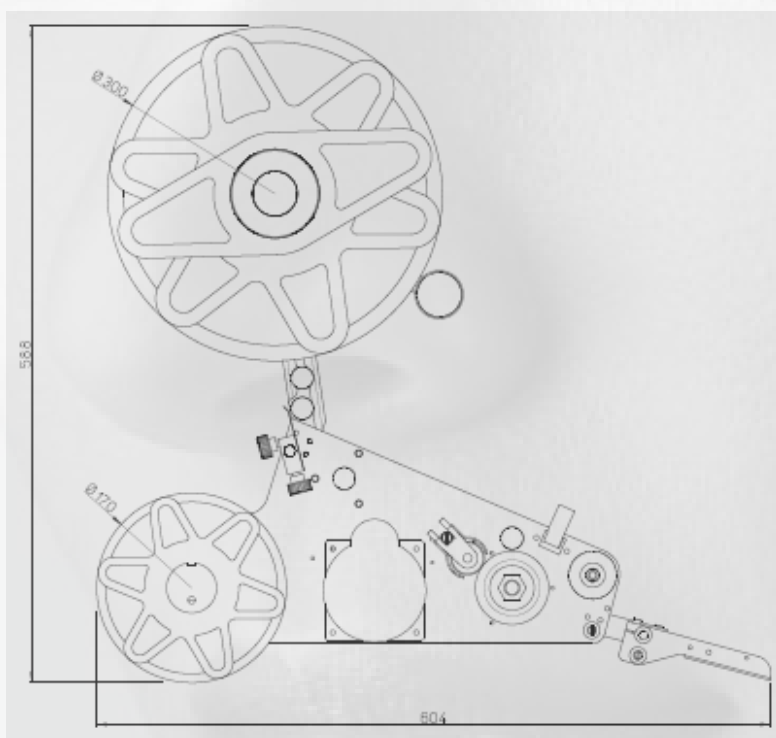

Available with Various Supports, Adjustments, Applicators.....

